

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>7</sup> : <b>G01C 22/02</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/50846</b> (43) International Publication Date: 31 August 2000 (31.08.00)
--	-----------	---

(21) International Application Number: PCT/US00/04418

(22) International Filing Date: 21 February 2000 (21.02.00)

(30) Priority Data:  
60/120,931 22 February 1999 (22.02.99) US(71) Applicant: MAGELLAN DIS INC. [US/US]; 2950 Waterview,  
Rochester Hills, MI 48309 (US).(72) Inventor: BEGIN, John, D.; 41160 Cilantro, Sterling Heights,  
MI 48314 (US).(74) Agents: CARLSON, John, E. et al.; Suite 101, 39400 Wood-  
ward Avenue, Bloomfield Hills, MI 48304-5151 (US).(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG,  
BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE,  
ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,  
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,  
MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU,  
SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG,  
UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS,  
MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ,  
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GW, ML, MR, NE, SN, TD, TG).**Published***With international search report.**Before the expiration of the time limit for amending the  
claims and to be republished in the event of the receipt of  
amendments.*

(54) Title: VEHICLE SPEED SENSOR FOR NAVIGATION SYSTEM

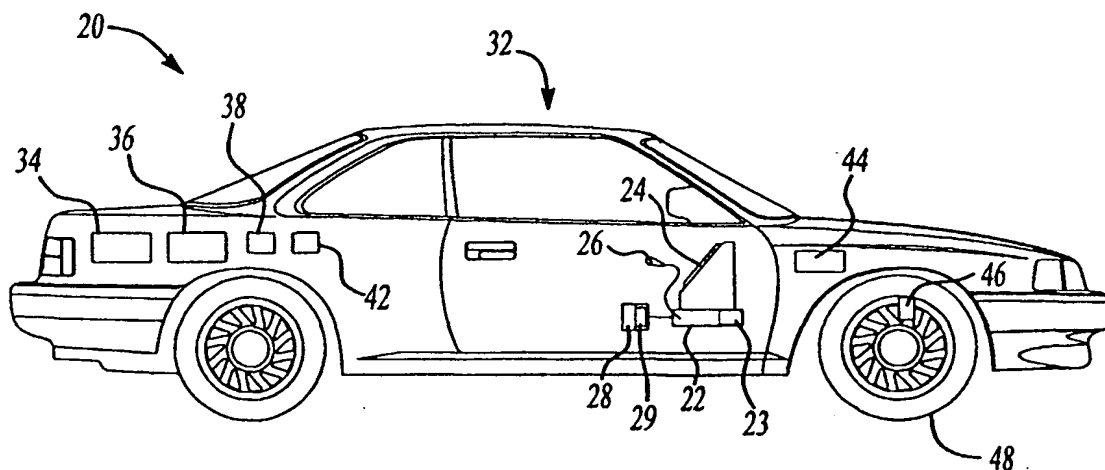

## (57) Abstract

A vehicle navigation system includes a vehicle displacement sensor comprising a wireless transmitter generating a signal indicating rotational displacement of a vehicle component. A complementary wireless transmitter receives the signal from the transmitter. A computer calculates vehicle speed or displacement based upon the rotational speed or displacement of the vehicle component. In a preferred embodiment, the transmitter is secured to a wheel of the vehicle and generates an RF signal upon each revolution of the wheel.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## VEHICLE SPEED SENSOR FOR NAVIGATION SYSTEM

### BACKGROUND OF THE INVENTION

The present invention relates generally to a vehicle speed sensor and more  
5 particularly to a vehicle speed sensor for use in a navigation or dead reckoning system.

Many vehicle navigation or route-guidance systems utilize "dead-reckoning" to propagate the position of the vehicle, usually in combination with other sensors and known techniques, such as a GPS receiver, map-matching, etc. For dead-reckoning, generally the displacement or speed of the vehicle is measured, as is the vehicle's  
10 heading. By determining the displacement of the vehicle in a determined heading, the position of the vehicle is propagated, typically relative to a database of roads.

The speed and/or displacement of the vehicle is currently obtained directly from the vehicle's electrical and control systems. Since vehicles' electrical control systems are not standardized, it is often costly or inconvenient to connect to these  
15 systems when installing a navigation system in the vehicle. Moreover, some manufacturers are eliminating the availability of speed information to "third party" electronic systems.

### SUMMARY OF THE INVENTION

20 The present invention provides a vehicle speed sensing system which can be installed easily in any vehicle to provide displacement and speed information to the navigation system. The speed sensing system generally comprises a remote unit fixed on a part of the vehicle which rotates proportionately to displacement of the vehicle. A receiving unit is affixed to the vehicle and receives a signal from the remote unit  
25 indicative of the rotation of displacement of the rotating vehicle part. The displacement of the vehicle is proportional to the rotational displacement of the vehicle part.

Preferably, the remote unit counts the rotations of the vehicle part. In one embodiment, a transmitter in the remote unit sends a "beacon" signal upon each one or  
30 one-half rotations of the vehicle part. The relationship of rotation of the vehicle part to

-2-

vehicle displacement is determined by comparing rotations of the vehicle part with other measured or computed displacements of the vehicle, as determined from the other sensors and/or comparison to a map database.

5 In one embodiment, the remote unit is secured to the air pressure valve stem of the vehicle wheel. The remote unit includes its own power source which generates power from the rotational energy.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

10 The above, as well as other advantages of the present invention, will become readily apparent to those skilled in the art from the following detailed description of a preferred embodiment when considered in the light of the accompanying drawings in which:

Figure 1 is a schematic of the navigation system for the present invention.

15 Figure 2 is an enlarged, partially exploded view of the remote unit of the vehicle speed sensor of Figure 1.

Figure 3 is a more detailed schematic of the remote unit and receiving unit of the vehicle speed sensor of Figure 1.

Figure 4 illustrates one embodiment of the vehicle speed sensor of Figure 3.

20 Figure 5 is a schematic of a second embodiment of the vehicle speed sensor of Figure 3.

Figure 6 is a schematic of a third embodiment of the vehicle speed sensor of Figure 3.

### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

25 The navigation system 20 of the present invention is shown schematically in Figure 1. The navigation system 20 includes a CPU 22 having RAM 23 and connected to a display 24, such as a high resolution LCD or flat panel display. The CPU 22 is also connected to an input device 26 such as a mouse, keyboard, key pad, remote device or microphone. Alternatively, the display 24 can be a touch screen display.

30 The navigation system 20 further includes a storage device 28, such as a hard drive 28

-3-

or CD ROM, connected to the CPU 22. The storage device 28 contains a database 29 including a map of all the roads in the area to be traveled by the vehicle 32 as well as the locations of potential destinations, such as addresses, hotels, restaurants, and may contain the software for the CPU 22, including the graphical user interface, route guidance, operating system, position-determining software, etc.

The navigation system 20 preferably includes position and motion determining devices, such as a GPS receiver 34, a gyroscope 36, a compass 38, and a multi-axis accelerometer 40, all connected to the CPU 22 (connections not shown for simplicity). Such position and motion determining devices are well known and are commercially available. The navigation system 20 further includes a speed sensor 44, 46, which will be explained in more detail with reference to the other figures.

As is well known, the position and motion determining devices determine the position of the vehicle 32 relative to the database of roads. Further, as is known in navigation systems, the user can select a destination relative to the database of roads utilizing the input device 26 and the display 24. The navigation system 20 then calculates and displays a recommended route directing the driver of the vehicle 32 to the desired destination. Preferably, the navigation system 20 displays turn-by-turn instructions on display 24, guiding the driver to the desired destination.

The vehicle speed sensor 44, 46 comprises a receiving unit 44 and a remote unit 46. The remote unit 46 is secured to a wheel 48 of the vehicle 32. Generally, the remote unit 46 generates a signal indicative of the rotational displacement of the wheel 48. The receiving unit 44 receives the signal from the remote unit 46 and relays the signal to the CPU 22. Preferably, the remote unit 46 generates a "beacon" signal one time for every revolution of the wheel 48. In another embodiment, the remote unit 46 counts revolutions of the wheel 48 and periodically sends an intelligent signal indicating the number of revolutions. The number of revolutions of the wheel 48 will be proportional to the displacement of the vehicle 32.

Speed of the vehicle 32 is derived from the displacement over a given time period. The CPU 22 (with the necessary software) calibrates the vehicle speed sensor 44, 46 automatically. Preferably, the CPU 22 determines the mathematical

-4-

relationship between revolutions by wheel 48 (or beacon signals from remote unit 46) and vehicle displacement. The CPU 22 determines this relationship by comparing the number of revolutions of wheel 48 (or beacon signals) with distances as determined by any or a combination of other sensors or techniques, such as the GPS receiver 34, the  
5 accelerometer 42 and map-matching with database 29.

Once the relationship of signals from remote unit 46 and vehicle speed is determined, vehicle speed from the vehicle speed sensor 44, 46 is utilized by the CPU 22 in propagating position of the vehicle 32 by dead-reckoning, utilizing known techniques. Since the vehicle speed sensor 44, 46 is calibrated after installation onto  
10 the vehicle 32, there is no need to provide any information to the CPU 22 regarding the type of vehicle 32 onto which the vehicle speed sensor 44, 46 is installed.

The remote unit 46 may be secured to the vehicle wheel 48 as shown in Figure 2. The remote unit 46 is secured to the valve stem 50 of the wheel 48. The remote unit 46 includes an internally threaded inner end which is threaded onto the  
15 externally threaded outer end of valve stem 50, replacing the typical valve stem cap.

Figure 3 is a high-level schematic of the receiving unit 44 and remote unit 46. Generally, the remote unit 46 includes a transmitter 54 and a power source 56. The receiving unit 44 includes a receiver 58, complementary to the transmitter 54. The receiving unit 44 further includes circuitry 60 for relaying the information from the  
20 receiver 58 to the CPU 22 (Figure 1).

Figure 4 illustrates one embodiment implementing the schematic of Figure 3. In Figure 4, the remote unit 46 includes a power source 56 which is simply a mass 56a moveable within a housing of remote unit 46. The transmitter 54 of remote unit 46 is a tuning fork 54a. The receiving unit 44 includes a receiver 58a which is generally a  
25 microphone and high-Q tuned receiver, tuned to receive the frequency of tuning fork 54a. In this embodiment, the remote unit 46 must be mounted near the center of the rotating wheel 48. The mass 56a, preferably a steel ball, falls towards the center of the earth and strikes the tuning fork 54a once per revolution of wheel 48. The frequency emitted from tuning fork 54a is detected by the receiver 58a and the circuitry 60  
30 indicates to the CPU 22 (Figure 1) that one revolution of wheel 48 has occurred.

-5-

Figure 5 illustrates a second embodiment wherein the power source 56b comprises a mass 64 secured to a piezo generator 66. The piezo generator 66 is connected to a resonant LC tank circuit 54b. During each revolution, the mass 64 moves a distance with force and generates electrical charge to cause the resonant LC tank circuit 54b to generate a short RF burst. The receiver 58b is tuned to the frequency of the resonant LC tank circuit 54b. The circuitry 60 sends a signal to the CPU 22 (Figure 1) each time the RF burst is received from the remote unit 46, indicating one revolution of the wheel 48.

Figure 6 illustrates a third embodiment of the wheel speed sensor of Figure 3. The remote unit 46 again includes the piezo generator 66 and mass 64 which senses the revolutions of the wheel 48. The piezo generator 66 is connected to circuitry 72 which detects the change in force that the mass 64 exerts on the piezo generator 66 during revolution from positive 1G to negative 1G. The transmitter 54C is preferably an RF transmitter powered by a battery 70. The transmitter 54C may send an RF burst or "beacon" signal once or twice per revolution of the wheel 48.

More preferably, the circuitry 72 accumulates a plurality of revolutions, preferably between 10 to 50, and generates a modulated signal which is sent by the RF transmitter 54C. The complementary RF receiver 58C receives the modulated signal indicating a number of revolutions and a circuitry 60 indicates this number to the CPU 22.

The remote unit 46 optionally includes a receiver 74 which receives an interrogation signal from a transmitter 76 in the receiving unit 44. In this case, the circuitry 72 would accumulate the number of revolutions sensed by the piezo generator 66 until the receiving unit 44 transmits an interrogation signal from transmitter 76 which is received by receiver 74 on the remote unit 46. Upon receiving the interrogation signal, the circuitry 72 modulates the number of revolutions, which is sent via transmitter 54C to the receiver 54C. The remote unit 46 may include a "sleep mode" during which power is conserved, but revolutions are counted. Upon receiving the interrogation signal, the remote unit "wakes up" and transmits the number of revolutions.



-6-

Alternatively, transmitter 54C may use modulated backscatter to communicate a modulated signal, such as number of revolutions, to receiving unit 44. Modulated backscatter is generally known to those skilled in the art. Generally, the transmitter 54C includes an antenna that can be resonant or non-resonant at the frequency beam employed. Resonance is switched on and off by a transistor connected across the antenna. Changes in the impedance of the antenna are reflected back to the receiver/transmitter 58C, 76. If modulated backscatter is used, the transmitter 54C may be powered by the battery 70 or may be powered by the signal received from the transmitter 76.

The vehicle speed sensor 44, 46 of the present invention is easy to install into any vehicle 32. Since, the vehicle speed sensor 44, 46 is automatically calibrated by the navigation system 20, there is no need for information regarding the vehicle 32 onto which the vehicle speed sensor 44, 46 is installed.

It should be recognized that a separate microprocessor or other hardware or circuitry could also be used to calibrate the signal from the vehicle speed sensor 44, 46 and/or covert the signal to vehicle speed or displacement information.

In accordance with the provisions of the patent statutes and jurisprudence, exemplary configurations described above are considered to represent a preferred embodiment of the invention. However, it should be noted that the invention can be practiced otherwise than as specifically illustrated and described without departing from its spirit or scope.

-7-

## WHAT IS CLAIMED IS:

1. A vehicle displacement sensor comprising:  
a wireless transmitter generating a wireless signal indicative of a vehicle  
5 displacement; and  
a wireless receiver receiving said wireless signal from said transmitter.
2. The vehicle displacement sensor of claim 1 wherein said transmitter is  
mounted on a rotating component of a vehicle.  
10
3. The vehicle displacement sensor of claim 2 wherein said transmitter is  
mounted on a wheel.
4. The vehicle displacement sensor of claim 2 wherein said transmitter  
15 includes a power source.
5. The vehicle displacement sensor of claim 4 wherein said power source  
generates power based upon motion.
- 20 6. The vehicle displacement sensor of claim 2 wherein said transmitter  
generates an acoustic signal.
7. The vehicle displacement sensor of claim 2 wherein said transmitter  
generates an RF signal.  
25
8. The vehicle displacement sensor of claim 2 wherein said transmitter  
generates a fixed number of beacon signals upon each revolution of the vehicle part.
9. The vehicle displacement sensor of claim 9 wherein said fixed number  
30 is one.

-8-

10. The vehicle displacement sensor of claim 1 wherein said transmitter generates a modulated RF signal indicative of vehicle displacement.

11. A vehicle displacement sensor comprising:  
5 means for generating a wireless signal indicative of rotational displacement of a vehicle part;  
a wireless receiver receiving said wireless signal; and  
means for determining displacement of a vehicle based upon said wireless signal.

10 12. The vehicle displacement sensor of claim 11 wherein said means for generating is mounted on a wheel.

13. The vehicle displacement sensor of claim 12 wherein said means for  
15 generating includes a power source generating power based upon rotation.

14. The vehicle displacement sensor of claim 11 wherein said wireless signal is an acoustic signal.

20 15. The vehicle displacement sensor of claim 11 wherein said wireless signal is an RF signal.

16. The vehicle displacement sensor of claim 11 wherein said means for  
generating generates a fixed number of beacon signals upon each revolution of the  
25 vehicle part.

17. The vehicle displacement sensor of claim 19 wherein said fixed number is one.

-9-

18. The vehicle displacement sensor of claim 11 wherein said means for generating generates a modulated RF signal indicative of vehicle displacement.

19. The vehicle displacement sensor of claim 11 further including a mass  
5 movable relative to said vehicle part based upon motion, said wireless signal generated based upon motion of said mass.

20. The vehicle displacement sensor of claim 19 wherein said mass is mounted to a piezo-electric device.

10

21. The vehicle displacement sensor of claim 11 further including means for calibrating said wireless signal to vehicle displacement.

22. The vehicle displacement sensor of claim 11 further including means  
15 for dead-reckoning a position of a vehicle based upon said wireless signal.

23. A navigation system comprising:  
means for generating a wireless signal indicative of rotational displacement of a vehicle part;  
20 a receiver receiving said wireless signal; and  
means for propagating a position of the vehicle based upon said wireless signal.

24. The navigation system of Claim 23 further including means for  
25 calibrating said wireless signal to vehicle displacement.

25. The navigation system of Claim 23 further including a database of roads, said position of said vehicle propagated relative to said database of roads.

-10-

26. The vehicle displacement sensor of claim 23 further including means for dead-reckoning a position of a vehicle based upon said wireless signal.

27. The vehicle displacement sensor of claim 23 wherein said means for  
5 generating a wireless signal counts rotations of a vehicle wheel.











28. The vehicle displacement sensor of claim 27 further including means for calibrating rotations of said vehicle wheel to displacement of the vehicle.

10 29. A method for determining vehicle displacement including the steps of:  
generating a wireless signal indicative of rotational displacement of a vehicle  
part;  
receiving said wireless signal; and  
determining displacement of a vehicle based upon said wireless signal.

15

30. The method for determining vehicle displacement of Claim 29 further including the step of calibrating the wireless signal to vehicle displacement.

31. The vehicle displacement sensor of claim 30 further including the step  
20 of dead-reckoning a position of a vehicle based upon the wireless signal.

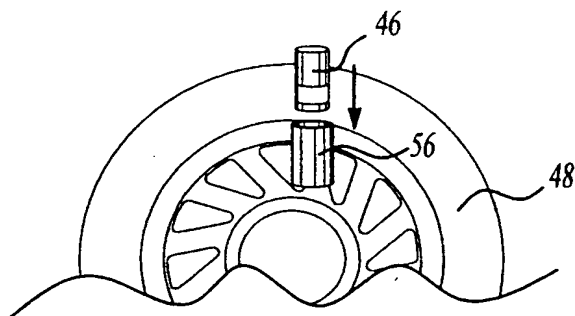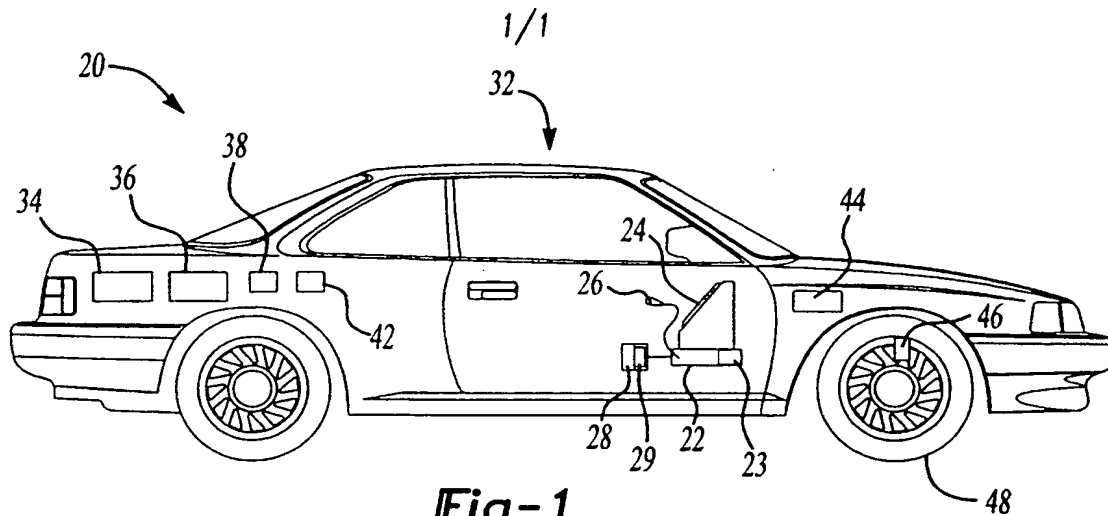

**Fig-4**

**Fig-5**

**Fig-6**

# INTERNATIONAL SEARCH REPORT

Int. .tional Application No

PCT/US 00/04418

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01C22/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 524 034 A (SRYGLEY JAMES G ET AL) 4 June 1996 (1996-06-04)	1-5, 7-13, 15-18,29 23,27
Y	abstract; claim 2 column 3, line 31 - line 50	
Y	US 5 828 585 A (WELK DOUGLAS LYNN ET AL) 27 October 1998 (1998-10-27)	23,27
A	column 3, line 39 - line 59; figure 4 column 7, line 16 - line 21 column 9, line 21 - line 36 column 12, line 26 - line 42 -/-	24-26,28

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

11 July 2000

Date of mailing of the international search report

19/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Hunt, J

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/04418

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 673 018 A (LOWE PETER R ET AL) 30 September 1997 (1997-09-30)  column 2, line 22 - line 38 column 3, line 5 - line 18 -----	1-4, 7-12, 15-18, 29
X	GB 2 242 527 A (MARCONI GEC LTD) 2 October 1991 (1991-10-02)  abstract page 3 page 8, paragraph 1 -----	1-5, 7, 8, 10-13, 15, 16, 18, 29



# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. l. Application No

PCT/US 00/04418

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5524034 A	04-06-1996	US 6034615 A	07-03-2000
US 5828585 A	27-10-1998	NONE	
US 5673018 A	30-09-1997	NONE	
GB 2242527 A	02-10-1991	NONE	